

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 February 2007 (22.02.2007)

PCT

(10) International Publication Number  
**WO 2007/021261 A1**

(51) International Patent Classification:  
**G06F 15/16** (2006.01)

(21) International Application Number:  
PCT/US2005/028510

(22) International Filing Date: 10 August 2005 (10.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **MES-SAGE LEVEL, LLC** [US/US]; One Broadway, 14th Floor, Cambridge, MA 02142 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CUNNINGHAM, Brian** [US/US]; One Broadway, 14th Floor, Cambridge, MA 02142 (US).

(74) Agents: **ALLEN, Charles, M.** et al.; Goodman, Allen & Filetti, PLLC, 4501 Highwoods Parkway, Suite 210, Glen Allen, VA 23060 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR DETECTING AND FILTERING UNSOLICITED AND UNDESIREED ELECTRONIC MESSAGES

(57) Abstract: A sending device locates and stores identifying information for each electronic message sent by the device. A receiving device, upon receipt of an electronic message, locates identifying information for the electronic message and the purported sending device of the message. The receiving device communicates a confirmation request to the purported sending device which contains identifying information for the message. The sending device receives confirmation messages and replies to such messages confirming that the message was sent if identifying information in the confirmation request corresponds to identifying information stored by the sending device and denying that the message was sent if the identifying information in the confirmation request does not correspond to stored data.



WO 2007/021261 A1

**SYSTEM AND METHOD FOR DETECTING AND FILTERING UNSOLICITED AND  
UNDESIRE ELECTRONIC MESSAGES**

**Technical Field**

5           The present invention relates to a system and a method for detecting and filtering unsolicited and undesired electronic messages by automatically verifying that the purported originator of the electronic message actually sent the message.

**Background Art**

10           Electronic communication is an essential tool in facilitating both business and personal communication. One form of electronic messaging, email, offers several advantages over traditional forms of communication. Email allows for the almost instantaneous exchange of information, it allows for the transmission of multiple messages at very little cost and it permits the transfer of large data files from one sender to another  
15           user. Nonetheless, the inherent nature of email gives rise to certain disadvantages. Most notable, and a topic of critical concern, is the increasing proliferation of unwanted and unsolicited email or "Spam."

            Spam is unsolicited email that is typically transmitted to an extremely large number of email recipients. Spam is the electronic equivalent to "junk mail" received by traditional  
20           mail service. Generally, a Spam email is a commercial advertisement attempting to sell a product or service. Spam typically directs the recipient to take some action in order to purchase the product or service being advertised. This may be in the form of offering a phone number or a hyperlink in the text of the spam message which, when utilized by the recipient will place the recipient in contact with the seller of the goods or services. Spam is  
25           often, although not exclusively, utilized by entities marketing products or services outside the norm of traditional retailers and service providers. Some Spam messages contain information or graphics unsuitable for email users, particularly those who are children. However, Spam offers tremendous marketing benefits as it allows a retailer, marketer, or other sender to reach an incredibly large audience with a minimal economic expenditure.

30           Unfortunately, this benefit to the sender of Spam comes at a considerable cost to the unwilling recipients of Spam messages. Spamming costs companies millions of dollars in congested servers, expenses incurred employing measures to block the Spam email, and lost productivity due to email recipients having to wade through large amounts of Spam solicitations in order to find desired email. Further, Spam email provides an ideal medium  
35           for computer hackers to infect users' systems through the introduction of computer viruses and other malicious code.

            Persons who desire to send Spam email are able to obtain email lists in a variety of ways. For example, email lists can be compiled from email addresses appearing on existing emails received by the sender or from users who provide their email address during

electronic transactions. Additionally, lists of addresses are often compiled by third parties and sold in the same manner that traditional address lists have been sold.

According to one estimate, as of January 2004, Spam email constituted as much as 60% of all email traffic on the Internet ("Microsoft Sets Its Sights on Defeating Spam," National Public Radio, *Morning Edition*, Feb. 2, 2004). As Spam has become more plentiful, there has arisen a great demand for an effective and efficient method which will detect and block delivery of these unsolicited messages.

Spam email, like all email, originates from a Sending Email System. All electronic messages, including Spam email messages, contain various data elements in a header, an envelope or another designated portion of the electronic message that facilitate transfer of the message. These include, most especially, the addresses of the intended recipients of the message, the address of the originator of the message and the date and time when the message was prepared. For example, under Internet standard RFC 2821, "Simple Mail Transfer Protocol," the message envelope of an email contains various data elements including an originator address and one or more recipient addresses. Similarly, under standard RFC 2822, "Internet Message Format" an internet message header for an email must contain an origination date and an originator address and typically includes a destination address field.

An email address, whether an originator or a recipient address, typically takes the form of "user@domain name." For either originator or recipient addresses, the domain name portion of the email address identifies the host system to which or from which email is sent or received. The "user" portion of the address identifies the specified user and is assigned by the host system which, in the case of an originator address, transmits emails prepared by the specified user or, in the case of a recipient address, receives email messages for the specified user.

A host system sending an email transfers email to an intended recipient by referencing the Domain Name System ("DNS"). When the sending host system receives a prepared email message, it first identifies the domain name for each of the intended recipients. Through processes well known to those schooled in the art, the sending host system then utilizes the Domain Name System ("DNS") to determine the Internet Protocol (IP) address of the host system associated with each of the domain names in each of the recipient email addresses.

Next, the sending host system communicates with each host system associated with an intended recipient utilizing an email transfer protocol. For example, RFC 2821, "Simple Mail Transfer Protocol," ("SMTP") describes one protocol typically used for the transfer of electronic messages.

Although a sending host system could communicate with a receiving host system over any one of the more than 65,000 communication ports available to either system, by convention email transmissions are typically conducted through one or more designated ports. For example, the Internet Assigned Numbers Authority ("IANA") has designated

communication ports numbered 0 through 1023 as System or Well Known Ports and further designated port 25 for Simple Mail Transfer. See <http://www.iana.org/numbers.html>.

Accordingly, by convention most SMTP processes are conducted by electronic communications between a sending host system's port 25 and a receiving host system's port 25.

Where a host system comprises a plurality of email servers servicing a single domain name, the DNS system provides one or more IP addresses for access to any of the servers. Thus, where a receiving email system may receive messages by a plurality of email servers, any sender querying the DNS system will receive the same unique IP address or set of unique IP addresses for the domain name. When an email or other electronic communication is made to the IP address, the receiving email system, through processes well known to those schooled in the art directs the transmission to the appropriate server within the receiving system.

DNS data may be stored at the individual client machine level as well as at the host system level. Additionally, DNS name servers are available through the Internet for inquiries that cannot be satisfied at the client machine or host system level.

As noted earlier, one data element customarily included in an email message is the email address from which the email originated. For example, an email user who prepared a message conforming to RFC 2822 would include an originating email address in the "From:" email header field such as "From: user@domain.com" in which "domain.com" is the domain name from which the message originated. Optionally, an originating email address, including a domain name, may appear in the "Sender:" email header field.

One partially effective method of blocking Spam messages known by those schooled in the art is for a Receiving Email System to identify the domains from which Spam is known to originate and then to block any future emails which are sent with originating email addresses that have that same domain name. A Receiving Email System simply compiles a list of the domain names which have sent Spam messages. This list, or "blacklist," is thereafter, referenced by the Receiving Email System whenever an email is received. If the email originated from a domain name on the blacklist, the message is blocked from delivery.

Those skilled in the art will recognize that the inverse of this technique can be, and has, also been implemented. That is, a Receiving Email System may compile a list of trusted domain names, or a "whitelist." Thereafter, whenever a message is received by the Receiving Email System the whitelist is referenced. If the message originated from a domain name on the whitelist, the message is delivered.

Many Receiving Email Systems employ both whitelists and blacklists. If the source domain is recognized as a trusted system because it is listed on the whitelist, the email is delivered. If it is not, the Receiving Email System references a blacklist to determine whether the source has been identified as a source of Spam email and refuses delivery if it has been so identified.

Several services, such as SpamCop and MAPS, have been formed to compile, maintain and share the domain data of known spamming domains. These services allow Receiving Email Systems to reference large databases of known sources of Spam email compiled from many sources so that the Receiving Email System participating in the service may exclude email originating from a domain known to be a source of Spam email. This method of filtering unsolicited email has been implemented at both the user level, the Receiving Email System level, as well as the Internet Service Providers (ISP) level. As a matter of reference, it is estimated that ISP America On-Line blocks almost 2 billion messages per day from identified spamming systems.

However, an increasing amount of Spam is bypassing blacklist measures and capitalizing on whitelists by "spoofing" itself as having originated from legitimate domains. Spoofing occurs when a spamming system provides a false originating email address as a data element in the email or the email envelope. The domain name of the false address may be a legitimate domain name, such as "aol.com," "hotmail.com," or "msn.com," or it may be a fictitious domain name. Spammers falsify or "spoof" the originating email address in a Spam message in order to bypass blacklists that are blocking Spam and to hide their actual identity from Receiving Email Systems. Because there is a plethora of legitimate domain names from which legitimate email might originate, a spamming system utilizing spoofing has an almost unlimited ability to conceal its identity from Receiving Email Systems by frequently changing the domain name which it falsely provides as the source of the Spam messages being sent. As a matter of reference, it has been estimated that 70% of all Spam contains a spoofed originating email address.

Spoofing further compromises the ability of a Receiving Email System to use blacklists or whitelists to block Spam because of the potential for blocking legitimate and desired email transmissions. For example, a spammer may configure the spamming email system to send out Spam with an originating email address in the message header that identifies "hotmail.com" as the domain name from which the Spam email originated. In such a circumstance, email systems which receive these Spam messages and which utilize blacklists are faced with a dilemma. Although they could block all emails originating from the hotmail.com domain, this would have the undesirable effect of also blocking all non-Spam, desired emails coming from hotmail.com users.

Accordingly, if a Receiving Email System relies upon blacklists and whitelists only to block Spam it must either deliver spoofed Spam email or deny delivery of a significant amount of desired email. The first shortcoming occurs when a Spammer spoofs a domain name which exists on the Receiving Email System's trusted domain name list, that is, its whitelist. The second occurs when the Receiving Email System identifies a domain as a spamming domain and provides the domain data for that domain to a local or centrally maintained blacklist because the domain name was falsely shown as the originating domain for Spam email. Thereafter, when non-Spam email is originated from the domain and transmitted to the same Receiving Email System or to another Receiving Email System

which references the same blacklist, the non-Spam email will be blocked.

The spoofing problem is further exacerbated by the inability of system administrators to identify all potential domain names from which non-Spam email might originate.

Therefore, it has become increasingly difficult for system administrators to avoid blocking legitimate email while simultaneously stopping "spoofed" Spam because they cannot blacklist and block domain names that are heavily utilized by legitimate email senders and because they cannot be certain that some desired email will not be blocked if they add a previously unidentified spamming domain name to a blacklist.

One method for identifying Spam which has been spoofed is to compare the IP address of the Sending Email System transmitting the suspect email message with the IP address assigned to the domain name identified in the originator's email address. Customarily, when a Sending Email System transmits an email message, the Sending Email System identifies itself to the Receiving Email System during the transmission connection. For example, under RFC 2821, Simple Mail Transfer Protocol, the "Hello" command is used by the Sending Email System to identify itself to the Receiving Email System and the command line includes the domain name of the Sending Email System. One way, therefore, to determine whether a spoofed email is being transmitted is to determine the IP address of the domain name in the "Hello" command from DNS and to determine the IP address of the domain name for the domain name provided in the email address of the originator as set forth in the email or the email envelope. If the two IP addresses are the same, then the email message is presumptively non-Spam. However, if the two IP addresses are different, then the email is presumptively determined to be Spam.

This method, commonly referred to as "reverse MX record look-up" is somewhat effective in identifying Spam. However, where a spammer spoofs both the origination address provided in the email headers and envelopes, but also the domain name for the Sending Email System during the SMTP communication transaction, this method fails. Thus, a sophisticated spoofer may provide a false origination address that includes a valid domain name and also provide a false Sending Email System domain name or a false Sending Email System IP address during the SMTP transaction ensuring, however, that the false origination address and the false Sending Email System domain name or IP address are consistent. In this way, the spoofer may avoid detection of the Spam email by those administrators employing reverse MX record look-up.

Another method for identifying Spam which has been spoofed that is taught in the prior art is to analyze portions of the email message itself to determine whether the message is Spam. According to this method, suspected Spam email is electronically analyzed or "filtered" according to one or more algorithms which assess the content of various portions of the suspected email, including, for example, the subject line, other data elements in the header of the email, the contents of the message itself, or any combination of these.

Several types of these Spam filtering mechanisms are disclosed by the prior art.

These systems permit a Receiving Email System to assess email messages to determine if they should be delivered. For example U.S. Pat. No. 5,999,932 (Paul '932) and U.S. Pat. No. 5,884,033 (Duvall '033) disclose varieties of filtering methods.

The Duvall '033 patent discloses a filtering system that, in part, compares portions of received email messages to information in a data system of information typically contained in Spam messages. The Duvall '033 system has the capability to search an email for a particular string of characters, and for a particular orientation of such characters, in order to determine whether a received email message is objectionable and should, therefore, be determined to be Spam.

The Paul '932 patent discloses a Spam filtering method in which multiple steps are performed. First, data from one or more data elements from an incoming email is compared with stored data. If the data properly cross-references, according to pre-determined criteria, the mail is delivered. If not, one or more additional heuristic techniques are executed in order to determine if the email is valid and should be delivered.

Unfortunately, these types of Spam filters suffer from serious drawbacks. Filtering programs typically require substantial processing capacity. Such programs require every suspected Spam message to be parsed and analyzed by the various algorithms employed by the program. Therefore, filtering programs may not be suitable for installation on a single email recipients' computer because the processing capacity of the computer is unlikely to be sufficient to operate the filtering program as well as other applications. However, even if the processing capacity of the Receiving Email System is substantial, it is still likely to be heavily taxed by a filtering program, particularly if the Receiving Email System receives a high volume of email and large number of suspected Spam messages.

Consequently, some organizations have built Filtering Email Systems, separate systems which receive incoming emails and process the email messages using filtering programs or other methods before transmitting them to the Receiving Email System for delivery. Where the utilization of a filtering program is preferred, the use of a Filtering Email System reduces the demand on the system resources of the Receiving Email System that would be encountered if the program was run on the Receiving Email System itself.

Even when a Filtering Email System is used, however, these filtering systems are inefficient and are unable to consistently filter out inappropriate email while permitting the delivery of valid email. This is true because the algorithms utilized, while complex, are not sufficiently sophisticated to fairly and fully analyze and assess message content. Moreover, Spammers can employ techniques, such as using broken words and numeric representations for letters in order to avoid detection by filtering programs. For example, "Viagra" could be entered as "Via gra" or "V1agra" in order to avoid detection.

In an attempt to overcome these drawbacks, Publication No. 2003/0009698 discloses a system for filtering Spam that relies upon the transmission of a "confirmation request" by the Receiving Email System to the purported sender. The confirmation request is a reply email automatically generated by the Receiving Email System in response to any incoming

the code to send Spam email without detection. Further, this system requires authentication by, and repeated communication with, a third-party authenticator. Additionally, users of this system are dependent upon a third party's representations that a particular Sending Email Server is not a spamming system.

5 There is the need, therefore, for a system and method for the detection and filtering of Spam email that can be performed by Sending and Receiving Email Systems without the intervention of senders or other persons and which does not excessively tax the processing resources of the mail servers. There is also a need for a method to identify Spam email sent by spoofing without blocking non-Spam email from the domain name which has been  
10 falsely identified as the origin of the Spam. There is also a need for a method which allows for the identification of Spam email which apparently originates from domain names known to be the origin for many non-Spam email messages without human intervention and without overtaxing the processing resources of Receiving Email Systems. The present invention addresses these needs.

### **Disclosure of Invention**

The present invention provides a system and a method for detecting and filtering undesired electronic messages by automatically verifying that the purported originator of a suspected message actually sent the message, so that unwanted and unsolicited electronic  
20 messages, particularly those with false originating address information, may be blocked from delivery.

The invention is a system that can be employed in conjunction with a variety of electronic message delivery and email protocols, including, for example, SMTP and SendMail. The system comprises a software module or Sending Module, which interacts  
25 with a device sending electronic messages, that is a Sending System and a second software module or Receiving Module, which interacts with a device receiving electronic messages, that is a Receiving System. The first and second software modules of the invention can be developed and implemented in a variety of programming languages and can be deployed on a variety of electronic systems. The first and second modules comprise the necessary code  
30 to perform the functions associated with a Sending System and a Receiving System respectively.

According to the invention, when a Sending System transmits an electronic message for delivery, the Sending Module prepares an Information Record which includes data uniquely identifying the electronic message which is being sent for delivery. Preferably, the  
35 Information Record includes the time and date that the message was prepared, data identifying the originator of the message, and data identifying the intended recipients of the message. Optionally, the Information Record may contain additional data related to the electronic message such as a unique message identifier. For example, in the case of an email message, the unique identifier contained in an email header's "Message-ID:" field as  
40 recommended by RFC 2822, "Internet Message Format" may be utilized.



email that does not originate from a whitelisted source or that may be potentially classified as Spam. The reply email requests that the original sender manually acknowledge the confirmation request in order for the sender to become a "trusted source." This method relies on the inability of most spamming systems to respond to reply emails and the virtual impossibility that the spamming system could respond to a large number of them. If the confirmation email cannot be successfully delivered or if the system does not receive a reply to the request, then the Receiving Email System lists the mail as Spam and deletes it. Otherwise, if the Receiving Email System receives a reply, it adds the domain name to a trusted source list, or whitelist, and forwards the message to the intended recipient.

Other patents, such as U.S. Pat 6,199, 102 (Cobb '102) disclose similar systems that utilize some form of confirmation return email message. In the case of the Cobb '102 patent, the confirmation email contains a question which must be answered by the sender or requires the sender to perform some other cognitive task that cannot be performed by a computer. If no response or an inappropriate response is received the suspect email is blocked from delivery and deleted.

Although the Cobb '102 invention and the method of Publication No. 2003/0009698 provide advantages over filtering programs, they suffer three significant drawbacks. First, they require the original sender of the email communication to take additional action, that is, to reply to the confirmation message, prior to delivery of the first communication. This creates additional, and typically unexpected and undesired, work on the part of the original sender. Additionally, where the sender is unavailable or unwilling to send a reply, delivery of the message may be delayed or denied. Second, these methods typically deliver, without requiring sender confirmation, any email messages which have originated from whitelisted domain names. Thus, if a Spammer spoofs a domain name which is listed on the whitelist utilized by a Receiving Email System employing one of these methods, the Spam email will be delivered without requiring a sender confirmation message. Finally, these challenge email methods require a second email delivery, typically sent to the message originator which could itself prompt the preparation of a challenge email and so on, leading to a cascade of emails. Even if this cascade is pre-empted by some programmed interruption, however, the employment of this method still leads to a substantial increase in email traffic.

The method and system disclosed by U.S. Pat. No. 6,393,465 (Leeds '465) attempts to solve the foregoing problems by attaching a secret authorization code to each message. Users of the Leeds '465 system are provided with an authorization code by a third party "overseer." The code is included in all email communications. When a Receiving Email System receives email containing a code that is unrecognized, the Receiving Email System may verify that the email sender is not a spammer by checking with the third party overseer.

While the Leeds '465 system does reduce the strain on Receiving Email Systems, it is fallible because it requires that the secrecy and integrity of the authorization codes be maintained. If a Spammer is able to decipher a participant's authorization code, he can use

Those schooled in the art will recognize that a variety of data elements can be utilized to uniquely identify an electronic message. For example, a checksum of the text of an email message or a portion of the message, or data prepared according to an algorithm applied to the message or a portion of the message could be used as a unique message  
5 identifier.

The Information Records for all of the electronic messages sent by the Sending System are stored in a database and organized for efficient retrieval. Preferably, all of the Sending Modules and Receiving Modules in the communication system practicing the invention will, by pre-arrangement, uniquely identify each electronic message by the same  
10 data element or set of data elements or by data prepared by the same algorithm.

According to the invention, when a "suspect electronic message" that is, an electronic message which the Receiving System cannot otherwise verify as authentic and desired, is received by a Receiving System, the Receiving Module withholds the suspect message from delivery. Next, the Receiving Module determines the identity of the Sending  
15 System from which the suspect message has purportedly been transmitted. This data may ordinarily be ascertained by referencing data in the suspect message, or, alternatively, from data in an envelope accompanying the message or from data transmitted during the transmission of the message. Next, the Receiving Module sends a confirmation request to the Sending System from which the suspect email has purportedly originated.

Those schooled in the art will recognize that, in the case of email messages, a Receiving Module can determine the Internet Protocol (IP) address of the purported Sending Email System by utilizing DNS in the same fashion that a Sending Email System utilizes DNS to determine the IP address for an email that it intends to send. Moreover, those  
20 schooled in the art will recognize that, in the event that a suspect email received by the Receiving Email System is a spoofed email, that is an email falsely identifying an originating email address with a domain name other than the system from which the email originated, the IP address provided to the Receiving Module by querying DNS will correspond to the domain name falsely identified as the originator and not the actual source for the email.  
25

The confirmation request from the Receiving Module contains data uniquely  
30 identifying the suspect message which, by pre-arrangement, corresponds to the data which a Sending Module in the same communication system would have stored if the message was sent by a Sending System practicing the invention. Preferably, the confirmation request includes the date and time that the suspect electronic message was prepared, the identification of the intended recipients of the message and data identifying the originator of  
35 the suspect email. Optionally, the confirmation request may include a unique message identifier.

When a Sending System receives a confirmation request from a Receiving Module, it communicates the confirmation request to the Sending Module. The Sending Module references the database containing Information Records for all of the electronic messages  
40 transmitted by the Sending System. If the Sending Module finds an Information Record

which was prepared for the suspect message, the Sending Module replies to the confirmation request confirming that the Sending System transmitted the suspect message. If the Sending Module does not find an Information Record which was prepared for the suspect message, the Sending Module replies to the confirmation request denying that the  
5 Sending System transmitted the suspect message.

When the Receiving System receives a reply to the confirmation request affirming that the Sending System sent the suspect message, the Receiving Module releases the suspect message for delivery to the intended recipient. When the Receiving System receives a reply to the confirmation request denying that the Sending System sent the  
10 suspect message, the Receiving Module destroys the suspect email message or otherwise disposes of it according to the preferences of the administrator of the Receiving System.

Where the invention is practiced by systems transmitting email messages, the confirmation request and the reply to the confirmation request are, preferably, performed by port to port communication between a Receiving Email System and a Sending Email  
15 System. For example, the communication may be conducted through one of the Registered Ports, that is, a port in the range 1024 to 49151. Under these circumstances, when a Receiving Module attempts to make a confirmation request of a Sending Email System which has not employed the invention and, therefore, does not have a Sending Module, the Sending Email System will either deny access to the port or fail to respond to the request.  
20 If either condition occurs, the Receiving Module can neither affirm nor deny that the email is Spam and may, optionally, further analyze the email using other filtering methods or deliver the email with a warning to the recipient that whether the email is Spam could neither be affirmed nor denied.

### **Brief Description of Drawings**

FIG. 1 is a schematic illustration of a Sending Email System and a Receiving Email System processing email according to the invention.

FIG. 2 is a schematic illustration of a Sending Email System and a Receiving Email System processing and filtering a spam email according to the invention.

FIG. 3 is a schematic illustration of plural Sending Email Systems and a Receiving Email System processing and filtering spam emails according to the invention and in conjunction with a spam filter.

FIG. 4 is a schematic illustration of plural Sending Email Systems and a Receiving Email System processing email according to the invention and in which a centralized  
35 Confirming Email System is utilized by one Sending Email System and one client user.

### **Best Mode for Carrying Out the Invention**

The present invention provides a system and a method for detecting and filtering undesired electronic messages by automatically verifying that the purported originator of a  
40 suspected undesired message actually sent the message, so that unwanted and unsolicited

messages, particularly those transmitted with false origination information, may be blocked from delivery. The description provided here is presented to enable one of ordinary skill in the art to make and practice the invention. However, various modifications to the preferred embodiments which are described will be apparent to those skilled in the art. Additionally, 5 although the present invention is described in relation to the detection of Spam email messages, those skilled in the art will appreciate that the system and method described may also be applied to other forms of electronic communication including, for example, text messaging by cellular telephones or voice over Internet Protocol (VoIP) messaging.

A preferred embodiment of the invention is shown in FIG. 1. A Sending Email 10 System (10) servicing the domain name abc.com is disposed to send email messages prepared by users with email addresses including the domain name abc.com. The Sending Email System (10) is in communication with a Sending Module (12). A Receiving Email System (20) servicing the domain name xyz.com is disposed to receive and deliver email messages to users with email addresses including the domain name xyz.com. The 15 Receiving Email System (20) is in communication with a Receiving Module (22).

Those schooled in the art will recognize that the Sending Email System may consist of a single computer running an email application (for example, Microsoft Outlook), an email server transmitting emails prepared by a plurality of users and serving one or more domain names, a plurality of email servers sending emails prepared by a plurality of users and 20 serving one or more domain names, or a Relay Email System, that is, a system receiving emails from another Sending Email System and forwarding these with or without modification to a Receiving Email System. Similarly, those schooled in the art will recognize that the Receiving Email System may consist of a single computer running an email application, an email server, a plurality of servers, or a Gateway Email System.

Gateway Email Systems include those systems which receive and forward emails to a plurality of Receiving Email Systems and additionally, those which operate to forward messages received in one email transport environment to an email recipient in another email transport environment. For example, a Gateway Email System may operate to receive messages by SMTP and forward them to systems or users receiving messages in 30 SendMail.

While for clarity of description of the invention the receiving and sending functions of each email system have been segregated, those schooled in the art will recognize that the sending and receiving functions may be and ordinarily are performed by a single computer serving as an email server.

Referring to FIG. 1, a Sending Email System (10) receives an email message (100) prepared by user with the email address sender@abc.com to be sent to a recipient with the email address recipient@xyz.com. Consistent with RFC 2822, "Internet Message Format", the sender's email address and the recipients' email address appear in the header portion of the email message at the header fields "From:" and "To" respectively. Additionally and 40 also consistent with RFC 2822, the date and time which the message was prepared is

inserted at the header Date: 2005.10.25

Prior to the transmission of the prepared email message, the Sending Module (12) generates an Information Record (13) containing data uniquely identifying the email being transmitted. Preferably the Information Record (13) includes data contained in the header of the email including the sender's address, the recipient's address and the date and time when the email was prepared. Additionally, an Identification Data String, that is a unique data element, such as a unique alphanumeric identifier, may optionally be generated by the Sending Module (12) and included in the Information Record (13) and in the header or body of the email message being sent. For example, the unique identifier included at the header "Message-ID:" as recommended by RFC 2822 may be used as an Identification Data String. Optionally, other Identification Data Strings, such as a checksum for the message text, may be prepared and stored in the Information Record related to the message.

The Information Record is stored by the Sending Module in an Information Record database (11). The database is organized for efficient search and retrieval of the Information Records. Those schooled in the art will recognize that the Information Record database may be stored on the same computer on which the sending module resides or may optionally be stored externally on a computer in communication with the Sending Module.

The email message is transmitted (101) by the Sending Email System via standard and well-known methods to the Receiving Email System (20) of the intended recipient. When the Receiving Email System (20) receives the email message or the suspect email, the Receiving Module (22) temporarily withholds delivery of the suspect email by routing the suspect email into a temporary hold queue (21) while it performs the confirmation process.

During the confirmation process, the Receiving Module (22) first determines the domain name in the originating email address from the message header of the suspect email. Next, the Receiving Module (22) prepares a confirmation request and transmits it (102) to the Sending Email System associated with the domain name identified as the source of the suspect email message. The confirmation request contains identification data which uniquely identifies the suspect email and by pre-arrangement, corresponds to the data which Sending Modules practicing the invention within the communication network use to uniquely identify emails. Preferably this data includes the date and time the suspect email was prepared, the sender's email address, and the addresses of the intended recipients of the email. This information will typically be extracted from the header fields of the suspect email.

Optionally, by pre-arrangement, the email message sent by a Sending Email System (10) contains an Identification Data String used by the Sending Module (12) to identify the email. In this circumstance, the confirmation request sent by the Receiving Email System (20) includes the Identification Data String in addition to other identification data, including, for example, the date and time that the email message was prepared, the email address of the sender of the email and the email addresses of the intended recipients of the email.

When a confirmation request is received by the Sending Email System (10), the Sending Email System communicates the confirmation request to the Sending Module (12). The Sending Module (12) compares the data submitted in the confirmation request with the Information Records stored in its Information Record database (11). When the Sending Module locates an Information Record (13) prepared for the email identified by the identification data submitted in the confirmation request, the Sending Module (12) replies to the confirmation request with an affirmation (103) that the Sending Email System (10) sent the suspect email.

Preferably, where the Sending Email System comprises at least one email server, the Receiving Email System communicates directly with the Sending Email System via port to port communications rather than by email transmission. For example, the communication may, by pre-arrangement between systems practicing the invention in the communications network, be conducted through one of the Registered Ports, that is, a port in the range 1024 to 49151.

Where the Sending Email System comprises a single client computer running an email application and which may be offline, it may be necessary for the Receiving Module to communicate with the Sending Module by specialized email communications. In such a circumstance, the Sending Module, by pre-arrangement with the Receiving Module, may include in the original email message data identifying the original email message as a transmission for which the confirmation request must be conducted by specialized email communication. Additionally, in this circumstance a confirmation request email includes data identifying the confirmation request email as a transmission for which a confirmation request should not be prepared.

When the Receiving Module receives a reply to the confirmation request that affirms that the Sending Email System sent the suspect email, the email is withdrawn from the temporary hold queue (21) and made available for delivery (104) to the recipient at the address recipient@xyz.com by the Receiving Email System (20).

FIG. 2 illustrates a preferred embodiment of the invention in operation to prevent the delivery of unsolicited and undesired Spam email. A Spamming Email System (50) is disposed to transmit Spam email messages. A Sending Email System (40) servicing the domain name abc.com is disposed to transmit email messages prepared by users with email addresses including the domain name abc.com. The Sending Email System (40) includes a Sending Module (42). The Sending Module comprises an Information Record database (41). A Receiving Email System (30) servicing the domain name xyz.com is disposed to receive and deliver email messages to users with email addresses including the domain name xyz.com. The Receiving Email System (30) includes a Receiving Module (32).

Referring to FIG. 2, a Spammer at email address spammer@qrs.com prepares a Spam email to be sent to recipient at email address recipient@xyz.com and sends it (105) to the Spamming Email System (50). However, in order to avoid detection, Spammer inserts a false origination address, sender@abc.com, in the header of the Spam email

message. In addition to the false origination address, the recipients' email address also appears in the header portion of the email message. The Spam email message also contains date and time data inserted by the Spammer at the header field, "Date:".

The Spam email message is transmitted (106) by the Spamming Email System (50) via standard and well-known methods to the Receiving Email System (30) of the intended recipient. When the Receiving Email System (30) receives the Spam email message or the suspect email, the Receiving Module (32) temporarily suspends delivery of the suspect email by routing the suspect email into a temporary hold queue (31) while it performs the confirmation process.

During the confirmation process, the Receiving Module (32) first determines the domain name for the purported originating email address from the message header of the suspect email. Because the Spammer has falsely provided sender@abc.com as the originating email address, the Receiving Module (32) will determine that abc.com is the domain name of the originating domain. Next, the Receiving Module (32) prepares a confirmation request and transmits it (107) to the domain, abc.com, identified as the source of the suspect email message. The confirmation request contains data which uniquely identifies the suspect email and which, by pre-arrangement, corresponds to data used by Sending Modules practicing the invention in the communication network to uniquely identify email messages. Preferably this data includes the date and time the suspect email was sent, the sender's email address, and the email address of the intended recipient of the email.

When a confirmation request is received by the Sending Email System (40), the Sending Email System communicates it to the Sending Module (42). The Sending Module (42) compares the data submitted in the confirmation request with the Information Records stored in its Information Record database (41). When the Sending Module fails to locate an Information Record prepared for the email corresponding to the data submitted in the confirmation request, the Sending Module (42) replies to the confirmation request with a denial (108) that the Sending Email System transmitted the suspect email.

When the Receiving Module receives a reply to the confirmation request that denies that the Sending Email System transmitted the suspect email, the Receiving Module (32) destroys the suspect email message or otherwise disposes of it according to the preferences of the administrator of the Receiving Email System.

In the preferred embodiment of the system which is described, the respective Receiving and Sending Modules communicate with one another via port to port communications. Where the Sending Email System comprises a single client computer running an email application which may be offline, it may be necessary for the Receiving Module to communicate with the Sending Module by specialized email communications. In such a circumstance, the Sending Module, by pre-arrangement with the Receiving Module, may include in the original email message data identifying the original email message as a transmission for which the confirmation request must be conducted by specialized email

communication. Additionally, in this circumstance a confirmation request email includes data identifying the confirmation request email as a transmission for which a confirmation request should not be prepared.

Where the Receiving Module (32) attempts to communicate a confirmation request to a Sending Email System that is not practicing the invention (not shown), the Receiving Module will either be denied access to the port for such confirmation requests or, alternatively, will be granted access but fail to receive an appropriate response from the Sending Email System. When this occurs the Receiving Module may, optionally, release the email for delivery to the intended recipient, may append data to the email informing the recipient that it was unable to confirm or deny that the email was Spam or may process the email according to other Spam detection methods.

Communication between Sending and Receiving Modules may also occur by Secure Sockets Layer protocols and, where additional security is desired, the communications may be encrypted and decrypted according to methodologies commonly known in the art.

The invention may also be practiced in combination with one or more alternate methods for detecting and filtering Spam e-mail. FIG. 3 illustrates a preferred embodiment of the invention in operation in conjunction with a Spam filter. A Spamming Email System (80) is disposed to transmit Spam email messages. A Sending Email System (60) servicing the domain name abc.com is disposed to transmit email messages prepared by users with email addresses including the domain name abc.com. The Sending Email System (60) includes a Sending Module (62). The Sending Module (62) comprises an Information Record database (61).

A Receiving Email System (70) servicing the domain name xyz.com is disposed to receive and deliver email messages to users with email addresses including the domain name xyz.com. The Receiving Email System (70) includes a Receiving Module (72) and a Spam filter module (75) disposed to parse and analyze suspect email messages according to one or more algorithms.

A second Sending Email System (90) servicing the domain name jkl.com is disposed to transmit email messages prepared by users with email addresses including the domain name, jkl.com.

Referring to FIG. 3, the second Sending Email System (90) receives an email message (109) prepared by user mailer@jkl.com to be transmitted to recipient at email address recipient@xyz.com. The sender's email address and the recipients' email address appear in the header portion of the email message. Additionally, the time and date the message was prepared is presented in the header of the email.

The email message is transmitted (110) by the Sending Email System via standard and well-known methods to the Receiving Email System (70) of the intended recipient. When the Receiving Email System (70) receives the email message or the suspect email, the Receiving Module (72) temporarily suspends delivery of the suspect email by routing the suspect email into a temporary hold queue (71) while it performs the confirmation process.



~~FIG. 3~~ During the confirmation process, the Receiving Module (72) first determines the domain name for the originating email address from the message header of the suspect email. Next, the Receiving Module (72) prepares a confirmation request and transmits it (111) to the domain identified as the source of the suspect email message. The

5 confirmation request contains data which uniquely identifies the suspect email and which by pre-arrangement, corresponds to the data used by Sending Modules practicing the invention in the communications network to uniquely identify email messages. Preferably this data includes the date and time the suspect email was prepared, the email address of the originator and the email addresses of the intended recipients of the email. Because the  
10 second Sending Email System (90) is not practicing the invention, the second Sending Email System (90) does not reply to the confirmation request.

Preferably, the confirmation request is transmitted to the Sending Email System (90) via port to port transmission over a port which by pre-arrangement has been designated for the communication of confirmation requests by Sending Email Systems practicing the  
15 invention in the communication network. When the Receiving Module (72) fails to communicate with the Sending Email System (90) or fails to receive an appropriate response to the confirmation request from the Sending Email System (90), the Receiving Module (72) removes the suspect email from the temporary hold queue (71) and forwards (112) the suspect email to the Spam filter module (75) for parsing and analysis.

20 The Spam filter module (75) processes the suspect email according to one or more Spam detection methods. When the Spam filter module (75) determines that the suspect email is not Spam email, the message is made available for delivery (113) to the intended recipient at recipient@xyz.com.

Similarly and again referring to FIG. 3, a Spammer at email address  
25 spammer@qrs.com prepares two Spam email messages to be sent to recipient at email address recipient@xyz.com. In order to avoid detection, the Spammer inserts a false origination address, sender@abc.com, in the header of the first Spam email message and sends it (114) to the Spamming Email System (80). The Spammer inserts a second false  
30 origination address, mailer@jkl.com, in the header of the second Spam email message and sends it (115) to the Spamming Email System. In addition to the false origination addresses, the recipients' email addresses and the date and time the email messages were prepared also appear in the header portion of the Spam email messages.

The first Spam email message is transmitted (116) by the Spamming Email System via standard and well-known methods to the Receiving Email System (70) of the intended  
35 recipient. When the Receiving Email System (70) receives the first Spam email message or the first suspect Spam email, the Receiving Module (72) temporary suspends delivery of the first suspect Spam email by routing the first suspect Spam email into the temporary hold queue (71) while it performs the confirmation process. Similarly, the second Spam email message is transmitted (117) by the Spamming Email System via standard and well-known  
40 methods to the Receiving Email System (70) of the intended recipient. When the Receiving

Email System receives the second Spam email message or the second suspect Spam email, the Receiving Module (72) temporarily suspends delivery of the second suspect Spam email by routing the second suspect Spam email into the temporary hold queue (71) while it performs the confirmation process.

5           During the confirmation process, the Receiving Module (72) first determines the domain names for the originating email addresses from the message headers of the first and second suspect Spam emails. Because the Spammer has falsely provided sender@abc.com as the originating email address for the first suspect Spam email and mailer@jkl.com as the originating email address for the second suspect Spam email, the  
10   Receiving Module (72) will determine that abc.com is the domain name of the originating domain for the first suspect Spam email and that jkl.com is the domain name of the second suspect Spam email.

Next, the Receiving Module (72) prepares a first confirmation request and transmits it (118) to the Sending Email System (60) servicing the domain, abc.com, which  
15   is identified as the source of the first suspect Spam email. The first confirmation request contains data which uniquely identifies the first suspect Spam email and which by pre-arrangement, corresponds to the data used by Sending Modules practicing the invention in the communications network to uniquely identify email messages. Preferably this data includes the date and time the first suspect Spam email was prepared, the email address of  
20   the purported originator of the message and the email addresses of the intended recipients of the email.

The Receiving Module (72) also prepares a second confirmation request and transmits it (119) to the Sending Email System (90) servicing the domain, jkl.com, which is identified as  
25   the source of the second suspect Spam email. The second confirmation request contains data which uniquely identifies the second suspect Spam email and which by pre-arrangement, corresponds to the data used by Sending Modules practicing the invention in the communications network to uniquely identify email messages. Preferably this data includes the date and time the second suspect Spam email was prepared and the email  
30   address of the purported originator of the message and the addresses of the intended recipients of the email.

When the first confirmation request is received by the Sending Email System (60) servicing the domain, abc.com, the Sending Email System communicates the request to the Sending Module (62). The Sending Module (62) compares the data submitted in the first  
35   confirmation request with the Information Records stored in its Information Record database (61). When the Sending Module fails to locate an Information Record prepared for the email corresponding to the data submitted in the confirmation request, the Sending Module (62) replies to the first confirmation request with a denial (120) that the Sending Email System (60) servicing abc.com sent the suspect email.

~~When the Receiving Module receives a reply to the confirmation request that denies that the Sending Email System sent the first suspect Spam email, the Receiving Module (72) destroys the first suspect Spam email message or otherwise disposes of it according to the preferences of the administrator of the Receiving Email System.~~

5 Preferably, the confirmation request and the reply to the confirmation request are transmitted to the via port to port transmission over a port which by pre-arrangement has been designated for the communication of confirmation requests by Receiving and Sending Email Systems practicing the invention in the communication network.

10 Since the Sending Email System (90) servicing the domain jkl.com is not practicing the invention, the Receiving Email System (70) will either not be able to communicate via the designated port with the Sending Email System (90) or it will fail to receive an appropriate response to the confirmation request. When the Receiving Module (72) fails to communicate with the Sending Email System (90) or fails to receive an appropriate response to the confirmation request from the Sending Email System (90), the Receiving  
15 Module (72) removes the suspect email from the temporary hold queue (71) and forwards (121) the suspect email to the Spam filter module (75) for parsing and analysis. The Spam filter module (75) processes the second suspect email message according to one or more Spam detection methods. When the Spam filter module (75) determines that the suspect email is Spam email, the Spam filter module (75) destroys the second suspect Spam email  
20 message or otherwise disposes of it according to the preferences of the administrator of the Receiving Email System.

Those skilled in the art will recognize that where a Sending Email System comprises a plurality of email servers servicing a single domain name, the Sending Module for the Sending Email System may comprise a centralized Information Record database in  
25 communication with each of the Sending Email System's email servers. In this circumstance each of the email servers of the Sending Email System will extract the data necessary to compile an Information Record from each email sent by the server. This data is communicated to the centralized Information Record database.

30 Similarly, when a confirmation request is received from a Receiving Email System, the Sending Email System will forward the request to the centralized Information Record database and the Sending Module will compare the data in the confirmation request with the data in the centralized Information Record database to determine whether the email corresponding to the confirmation request was transmitted by one of the email servers in the Sending Email System. When the Sending Module confirms that an Information Record  
35 prepared for the email message exists in the database it will reply in the affirmative and when the Sending Module fails to locate an Information Record prepared for the email message it will reply with a denial that the Sending Email System transmitted the email message corresponding to the data in the confirmation request.

40 In the embodiments illustrated thus far, the Sending Module is an integral part of a Sending Email System although the functions of the Sending Module may be distributed

among a plurality of computers within the Sending Email System. Those skilled in the art will also recognize that the Sending Module functions may also be performed by a Confirming Email System operating independent from the Sending and Receiving Email Systems. FIG 4. depicts an electronic communication network in which some of the  
5 Sending Email Systems in the network are practicing the invention. By pre-arrangement within the communication network, for confirmation purposes, each Sending Email System practicing the invention identifies each email sent by specified identification data. Preferably this data includes the sender's email address, the email addresses of the intended recipients and the date and time the email was prepared and an Identification Data  
10 String. The Identification Data String may be a data string prepared by an algorithm such as a checksum of the message text.

Referring to FIG. 4, a Sending Email System (170) servicing the domain name abc.com is disposed to transmit email messages prepared by users with email addresses including the domain name abc.com. The Sending Email System (170) includes a Sending  
15 Module (172). The Sending Module (172) comprises an Information Record database (171)

A Receiving Email System (150) servicing the domain name xyz.com is disposed to receive and deliver email messages to users with email addresses including the domain name xyz.com. The Receiving Email System (150) is in communication with a Receiving  
Module (152).

A Confirming Email System (180) is disposed to receive electronic communications, including email messages, and comprises a Centralized Sending Module (182). The Centralized Sending Module includes a Centralized Information Record database (181) and a Centralized Serviced Name Registry (185). The Centralized Serviced Name Registry includes a record of each domain name utilizing the Confirming Email System (180), as well  
25 as the email address of any domain name client utilizing the Confirming Email System for the confirmation of suspect emails.

A second Sending Email System (140) servicing the domain name jkl.com is disposed to transmit email messages prepared by users with email addresses including the domain name jkl.com. The second Sending Email System (140) is in communication with  
30 the Confirming Email System (180).

A third Sending Email System (160) servicing the domain name qrs.com is disposed to transmit email messages prepared by users with email addresses including the domain name, qrs.com.

Referring to FIG. 4, the first Sending Email System (170) receives an email message  
35 (400) prepared by user with the email address sender@abc.com to be transmitted to a recipient with the email address recipient@xyz.com. Consistent with RFC 2822, "Internet Message Format", the sender's email address and the recipient's email address appear in the header portion of the email message at the header fields "From:" and "To" respectively . Additionally and also consistent with RFC 2822, the date and time which the message was  
40 prepared is inserted at the header "Date:"

~~Prior to the transmission of the~~ prepared email message, the Sending Module (172) of the first Sending Email System generates an Information Record (173) containing the specified identification data for the email consistent with the pre-arrangement within the network regarding the data used to identify emails for confirmation purposes. The  
5 Information Record (173) is stored by the Sending Module (172) in an Information Record database (171). The database is organized for efficient search and retrieval of the Information Records.

The second Sending Email System (140) receives an email message (600) prepared by user with the email address mailer@jkl.com to be sent to a recipient with the email  
10 address recipient@xyz.com. Consistent with RFC 2822, "Internet Message Format", the sender's email address and the recipients' email address appear in the header portion of the email message at the header fields "From:" and "To" respectively. Additionally and also consistent with RFC 2822, the date and time which the message was prepared is inserted at the header "Date:"

15 Prior to the transmission (601) of the prepared email message to the Receiving Email System, the second Sending Email System (140) extracts the data from the email message necessary to compile an Information Record containing the specified identification data for the email consistent with the pre-arrangement within the network regarding the data used to identify emails for confirmation purposes. The second Sending Email System (140)  
20 communicates the data (610) to the Confirming Email System (180). This communication is, preferably, performed by port to port communication between the second Sending Email System (140) and the Confirming Email System (180).

The Confirming Email System communicates the data to the Centralized Sending Module (182) which generates an Information Record (183) containing the specified  
25 identification data for the email consistent with the pre-arrangement within the network regarding the data used to identify emails for confirmation purposes.

The third Sending Email System (160) receives an email message (500) prepared by user with the email address sendertoo@qrs.com to be sent to a recipient with the email address recipient@xyz.com. Consistent with RFC 2822, "Internet Message Format", the  
30 sender's email address and the recipients' email address appear in the header portion of the email message at the header fields "From:" and "To" respectively. Additionally and also consistent with RFC 2822, the date and time which the message was prepared is inserted at the header "Date:". The user with the email address sendertoo@qrs.com also sends (510) a copy of the email message to the Centralized Communication System (180).

35 Although the third Sending Email System (160) is not practicing the invention, the client machine for sendertoo@qrs.com transmits a copy of the email message to the Confirming Email System (180) so that confirmation may be conducted by the Confirming Email System (180). Those skilled in the art will recognize that this may be accomplished simply by identifying an email address for the Confirming Email System (180) as a cc: or  
40 bcc: recipient of the email message.

Upon receipt of the email message sent by sendertoo@qrs.com, the Centralized Sending Module (182) of the Centralized Communication System generates an Information Record (184) containing the specified identification data for the email consistent with the pre-arrangement within the network regarding the data used to identify emails for confirmation purposes.

The Information Record (183) prepared for the email message sent by mailer@jkl.com and the Information Record (184) prepared for the email message sent by sendertoo@qrs.com are stored by the Centralized Sending Module (182) in an Information Record database (181). The database is organized for efficient search and retrieval of the Information Records.

The first (401), second (601) and third (501) email messages are transmitted by the first (170), second (140) and third (160) Sending Email Systems via standard and well-known methods to the Receiving Email System (150) of the intended recipient. When the Receiving Email System (150) receives the first (401) second (601), and third (501) suspect emails, the Receiving Module (152) temporarily withholds delivery of each of the suspect emails by routing each suspect email into a temporary hold queue (151) while it performs the confirmation process.

During the confirmation process, the Receiving Module (152) first transmits a Confirmation Source Request to the Centralized Sending Module (182) for each of the suspect emails. The Confirmation Source Request for each email contains data identifying the purported sender of each suspect email. Preferably the Confirmation Source Request includes the email address of the purported sender for each suspect email. The Confirmation Source Request for the first suspect email (402) includes data identifying sender@abc.com as the purported sender, the Confirmation Source Request for the second suspect email (602) includes mailer@jkl.com as the purported sender and the Confirmation Source Request for the third suspect email (502) includes sendertoo@qrs.com as the purported sender. Upon receipt of each Confirmation Source Request, the Confirming Email System (180) compares the data identifying the purported sender with data in the records of the Centralized Serviced Name Registry (185) to determine whether the Confirming Email System (180) performs confirmation functions for the user or domain identified by each Confirmation Source Request.

When the Confirming Email System fails to identify a record in the Centralized Serviced Name Registry corresponding to the purported sender in the first Confirmation Source Request, the Confirming Email System replies (403) to the first Confirmation Source Request with a denial that it can confirm the first suspect email. When the Confirming Email System identifies a record in the Centralized Serviced Name Registry corresponding to the purported sender in the second and third Confirmation Source Requests, the Confirming Email System replies to each request (603 and 503) with an affirmation that it may perform a confirmation.

Upon receipt of the first reply (403) from the Confirming Email System denying that

the ~~Confirming Email System (180)~~ may perform a confirmation for the first suspect email, the Receiving Module (152) determines the domain name for the originating email address from the message header of the first suspect email. Next, the Receiving Module (122) prepares and transmits a first Confirmation Request (404) corresponding to the first suspect email (401) and transmits the first Confirmation Request to the Sending Email System associated with the domain name identified as the source of the suspect email message, that is, the first Sending Email System (170). The first Confirmation Request contains the specified identification data for the first suspect email consistent with the pre-arrangement within the network regarding the data used to identify emails for confirmation purposes.

Upon receipt of the second and third replies (503 and 603) from the Confirming Email System affirming that the Confirming Email System can perform confirmation for the second and third suspect emails, the Receiving Module (122) prepares and transmits a second Confirmation Request (604) corresponding to the second suspect email (601) to the Confirming Email System (180) and prepares and transmits a third Confirmation Request (504) corresponding to the third suspect email (501) to the Confirming Email System (180). The second and third Confirmation Requests contain the specified identification data for the second and third suspect email respectively consistent with the pre-arrangement within the network regarding the data used to identify emails for confirmation purposes.

When the first Confirmation Request (404) is received by the first Sending Email System (170) the Sending Email System communicates the request to the Sending Module (172). The Sending Module (172) compares the data submitted in the first Confirmation Request with the Information Records stored in its Information Record database (171). When the Sending Module locates an Information Record (173) prepared for the email identified by the identification data submitted in the first Confirmation Request, the Sending Module (172) replies to the first Confirmation Request with an affirmation (405) that the first Sending Email System (170) sent the first suspect email.

When the Receiving Module receives the affirmation reply (405) to the first Confirmation Request (404) that affirms that the first Sending Email System (170) sent the first suspect email, the email is withdrawn from the temporary hold box (151) and made available for delivery (406) to the recipient at the address recipient@xyz.com by the Receiving Email System (150).

When the second Confirmation Request (604) is received by the Confirming Email System (180), the Confirming Email System communicates the request to the Centralized Sending Module (182). Similarly, when the third Confirmation Request (504) is received by the Confirming Email System (180), the Confirming Email System communicates the request to the Centralized Sending Module (182).

The Centralized Sending Module (182) compares the data submitted in the second Confirmation Request with the Information Records stored in its Information Record database (181). When the Centralized Sending Module locates an Information Record (183) prepared for the email identified by the identification data submitted in the second

confirmation request, the Centralized Sending Module (182) replies to the confirmation request with an affirmation (605) confirming the authenticity of the second suspect email.

In like fashion, the Centralized Sending Module (182) compares the data submitted in the third Confirmation Request with the Information Records stored in its Information Record database (181). When the Centralized Sending Module locates an Information Record (184) prepared for the email identified by the identification data submitted in the third confirmation request, the Centralized Sending Module (182) replies to the confirmation request with an affirmation (505) confirming the authenticity of the third suspect email.

When the Receiving Module receives a reply to the second confirmation request confirming the authenticity of the second suspect email, the email is withdrawn from the temporary hold queue (151) and made available for delivery (606) to the recipient at the address recipient@xyz.com by the Receiving Email System (150). When the Receiving Module receives a reply to the third Confirmation Request confirming the authenticity of the third suspect email, the email is withdrawn from the temporary hold queue (151) and made available for delivery (506) to the recipient at the address recipient@xyz.com by the Receiving Email System (150).

Preferably, the communications between the Receiving Email System and the Confirming Email System are conducted via port to port communications. Further, those skilled in the art will recognize that the Receiving Email System may maintain a database of the email addresses and domains serviced by the Confirming Email System and may refer to this database in order to determine whether to make a Confirmation Request of the Confirming Email System or of the Sending Email System hosting the domain name of the purported sender. Further, where there is a plurality of Confirming Email Systems operating in a communications network, the database maintained by the Receiving Email System may identify the specific Confirming Email System performing confirmation functions for the purported sender. Alternatively, a consolidated Centralized Serviced Name Registry may provide a comprehensive database identifying the specific Confirming Email System for purported senders.

While the invention has been described in reference to certain preferred embodiments, it will be readily apparent to one of ordinary skill in the art that certain modifications or variations may be made to the system without departing from the scope of invention claimed below and described in the foregoing specification.

### **Industrial Applicability**

The invention may be used, in varying capacities, by both corporate and private entities for the detection and filtering of Spam. Users may implement the invention, and potentially incorporate one or more of its features, into their existing information technology infrastructure. By virtue of the inventions use, electronic mail operation would become more efficient and electronic mail communications between parties would be more secure.



**Claims** PCT/US2005/028510

I claim:

1. A system for preventing the delivery of unsolicited and undesired electronic messages comprising:

5 a sending device sending electronic messages wherein each said electronic message sent by said sending device contains data identifying each said electronic message sent and wherein each said electronic message sent by said sending device contains data identifying the sending device purportedly sending each said electronic message;

a receiving device receiving electronic messages, said receiving device

10 communicating with a receiving module,

said receiving module comprising:

means for temporarily withholding from delivery to the intended recipient an electronic message received by said receiving device;

15 means for locating within said received electronic message data identifying said received electronic message;

means for locating within said received electronic message data identifying the device from which the received electronic message is purported to have been sent;

means for preparing and transmitting a confirmation request to the device identified as the purported sender of said received electronic message, wherein said

20 confirmation request contains data identifying said received electronic message;

means for receiving a reply to said confirmation request wherein said reply affirms or denies that said received electronic message was sent by said device identified as the purported sender of said received electronic message, and;

25 means for permitting delivery of said received electronic message to the intended recipient when the reply to said confirmation request message affirms that the device identified as the purported sender of the message sent the message,

said sending device communicating with a sending module and said sending device comprising means for receiving a confirmation request from said receiving module and for communicating said confirmation request to said sending module,

30 said sending module comprising:

means for locating within each said electronic message sent by said sending device data identifying each said electronic message, wherein said data identifying each said electronic message corresponds to the data identifying said received electronic message included in said confirmation request;

35 means for copying and storing said data identifying each said electronic message sent by said sending device and wherein said data identifying each said electronic message copied and stored by said sending device corresponds to the data identifying said received electronic message included in said confirmation request prepared by said receiving module;

40 means for receiving a confirmation request from said sending device;

~~PCT/US2005/028510~~  
means for comparing the data identifying said received electronic message within said confirmation request with the data identifying each electronic message sent by said sending device and stored by said sending module to determine whether the data identifying said received electronic message in said confirmation request message identifies  
5 an electronic message sent by said sending device; and

means for replying to said confirmation request message wherein said reply confirms that said sending device sent the received electronic message when the data identifying said received electronic message contained within said confirmation request message identifies a message sent by said sending device and wherein said reply denies  
10 that said sending device sent the received electronic message when the data identifying the received electronic message contained within said confirmation request message does not identify an electronic message sent by said device sending electronic messages.

2. The system of claim 1 wherein the data identifying said received electronic message by said receiving module comprises the date and time the received electronic message was prepared and the electronic address for the purported sender of said received  
15 electronic message and wherein said data identifying each said electronic message sent by said sending device comprises the date and time each said electronic message was prepared and the electronic address for the sender of each said sent electronic message.

3. The system of claim 1 wherein the data identifying said received electronic message by said receiving module comprises the date and time the received electronic message was prepared, the electronic address for the purported sender of said received  
20 electronic message, and the electronic addresses for the intended recipients of said received electronic message and wherein said data identifying each said electronic message sent by said sending device comprises the date and time each said electronic message was  
25 prepared, the electronic address for the sender of each said sent electronic message, and the electronic addresses for the intended recipients of each said sent electronic message.

4. The system of claim 1 wherein the receiving module further comprises means for encrypting said confirmation request and means for decrypting said reply to said confirmation request and wherein the sending module further comprises means for  
30 decrypting said confirmation request and means for encrypting said reply to said confirmation request message.

5. A system for preventing the delivery of unsolicited and undesired electronic messages comprising:

a sending device sending electronic messages wherein each said electronic message  
35 sent by said sending device contains data identifying the sending device purportedly sending each said electronic message;

a receiving device receiving electronic messages, said receiving device communicating with a receiving module;

said receiving module comprising:

~~PCT/US2005/028510~~  
 means for temporarily withholding from delivery to the intended recipient an electronic message received by said receiving device;

means for preparing an identification data string from said received electronic message wherein said identification data string is prepared by applying an algorithm to said received electronic message;

means for locating within said received electronic message data identifying the device from which the received electronic message is purported to have been sent;

means for preparing and transmitting a confirmation request to the device identified as the purported sender of said received electronic message, wherein said confirmation request contains said identification data string prepared by said receiving module for said received electronic message;

means for receiving a reply to said confirmation request wherein said reply affirms or denies that said received electronic message was sent by said device identified as the purported sender of said received electronic message, and;

means for permitting delivery of said received electronic message to the intended recipient when the reply to said confirmation request message affirms that the device identified as the purported sender of the message sent the message,

said sending device communicating with a sending module and said sending device comprising means for receiving confirmation requests from said receiving module and for communicating said confirmation requests to said sending module,

said sending module comprising:

means for preparing an identification data string for each electronic message sent by said sending device wherein said identification data string is prepared by applying said algorithm to each said sent electronic message;

means for storing said identification data string for each said electronic message sent by said sending device;

means for receiving a confirmation request from said sending device;

means for comparing the identification data string for a received electronic message within said confirmation request with each identification data string for each electronic message sent by said sending device and stored by said sending module to determine whether the identification data string for said received electronic message in said confirmation request message identifies an electronic message sent by said sending device; and

means for replying to said confirmation request message wherein said reply confirms that said sending device sent the received electronic message when the identification data string identifying said received electronic message contained within said confirmation request message identifies a message sent by said sending device and wherein said reply denies that said sending device sent the received electronic message when the identification data string identifying the received electronic message contained within said

confirmation request message does not identify an electronic message sent by said device sending electronic messages.

6. The system of claim 5 wherein the receiving module further comprises means for encrypting said confirmation request and means for decrypting said reply to said confirmation request and wherein the sending module further comprises means for decrypting said confirmation request and means for encrypting said reply to said confirmation request message.

7. The system of claim 5 wherein said sending module further comprises means for including said identification data string in each said sent electronic message.

8. A system for preventing the delivery of unsolicited and undesired electronic messages comprising:

a sending device sending electronic messages wherein each said electronic message sent by said sending device contains data identifying each said electronic message sent and wherein each said electronic message sent by said sending device contains data identifying the sending device purportedly sending each said electronic message;

a receiving device receiving electronic messages, said receiving device communicating with a receiving module;

said receiving module comprising:

means for temporarily withholding from delivery to the intended recipient an electronic message received by said receiving device;

means for locating within said received electronic message data identifying said received electronic message;

means for locating within said received electronic message data identifying the device from which the received electronic message is purported to have been sent;

means for preparing an identification data string from said received electronic message wherein said identification data string is prepared by applying an algorithm to said received electronic message;

means for preparing and transmitting a confirmation request to the device identified as the purported sender of said received electronic message, wherein said confirmation request contains data identifying said received electronic message and said identification data string prepared for said received electronic message;

means for receiving a reply to said confirmation request wherein said reply affirms or denies that said received electronic message was sent by said device identified as the purported sender of said received electronic message, and;

means for permitting delivery of said received electronic message to the intended recipient when the reply to said confirmation request message affirms that the device identified as the purported sender of the message sent the message,

said sending device communicating with a sending module and said sending device comprising means for receiving confirmation requests from said receiving module and for communicating said confirmation requests to said sending module,

~~P~~ said sending module comprising:

means for locating within each electronic message sent by said sending device data identifying each said electronic message, wherein said data identifying each said electronic message corresponds to the data identifying said received electronic message  
5 included in said confirmation request;

means for preparing an identification data string for each electronic message sent by said sending device wherein said identification data string is prepared by applying said algorithm to each said sent electronic message;

10 means for copying and storing said identification data string and said data identifying each said electronic message sent by said sending device and wherein said data identifying each said electronic message copied and stored by said sending device corresponds to the data identifying each received electronic message included in said confirmation request prepared by said receiving module;

means for receiving a confirmation request from said sending device;

15 means for comparing the identification data string and the data identifying said received electronic message within said confirmation request with each identification data string and the data identifying each electronic message sent by said sending device and stored by said sending module to determine whether the identification data string and the data identifying said received electronic message in said confirmation request message  
20 identifies an electronic message sent by said sending device; and

means for replying to said confirmation request message wherein said reply confirms that said sending device sent the received electronic message when the identification data string and the data identifying said received electronic message contained within said confirmation request message identifies a message sent by said sending device  
25 and wherein said reply denies that said sending device sent the received electronic message when the identification data string and the data identifying the received electronic message contained within said confirmation request message does not identify an electronic message sent by said device sending electronic messages.

9. The system of claim 8 wherein the data identifying said received electronic  
30 message by said receiving module comprises the date and time the received electronic message was prepared and the electronic address for the purported sender of said received electronic message and wherein said data identifying each said electronic message sent by said sending device comprises the date and time each said electronic message was prepared and the electronic address for the sender of each said sent electronic message.

35 10. The system of claim 8 wherein the data identifying said received electronic message by said receiving module comprises the date and time the received electronic message was prepared, the electronic address for the purported sender of said received electronic message, and the electronic addresses for the intended recipients of said received electronic message and wherein said data identifying each said electronic message sent by  
40 said sending device comprises the date and time each said electronic message was

prepared, the electronic address for the sender of each said sent electronic message, and the electronic addresses for the intended recipients of each said sent electronic message.

11. The system of claim 8 wherein the receiving module further comprises means for encrypting said confirmation request and means for decrypting said reply to said confirmation request and wherein the sending module further comprises means for decrypting said confirmation request and means for encrypting said reply to said confirmation request message.

12. A system for preventing the delivery of unsolicited and undesired electronic messages comprising:

a sending device sending electronic messages wherein each said electronic message sent by said sending device contains data identifying each said electronic message sent and wherein each said electronic message sent by said sending device contains data identifying said sending device;

a confirmation device in communication with said sending device;

a receiving device receiving electronic messages, said receiving device communicating with a receiving module;

said receiving module comprising:

means for temporarily withholding from delivery to the intended recipient an electronic message received by said receiving device;

means for locating within said received electronic message data identifying the device from which the received electronic message is purported to have been sent;

means for preparing and transmitting a confirmation request to said confirmation device wherein said confirmation request contains data identifying said received electronic message and data identifying the device from which said received electronic message is purported to have been sent;

means for receiving a reply to a confirmation request wherein said reply affirms or denies that said received electronic message was sent by said device identified as the purported sender of said received electronic message, and;

means for permitting delivery of said received electronic message to the intended recipient when the reply to said confirmation request message affirms that the device identified as the purported sender of the message sent the message,

said sending device comprising means for transmitting to said confirmation device data identifying each electronic message sent by said sending device wherein said data identifying each said electronic message corresponds to the data identifying said received electronic message in said confirmation request;

said confirmation device comprising:

means for storing said data identifying each said electronic message sent by said sending device and wherein said data identifying each said electronic message copied and stored by said confirmation device corresponds to the data identifying said received electronic message in said confirmation request prepared by said receiving module;

~~PCT/US2005/028510~~ means for receiving a confirmation request from said receiving module;

means for comparing the data identifying said received electronic message within said confirmation request with the data identifying each electronic message sent by said sending device and stored by said confirmation device to determine whether the data identifying said received electronic message in said confirmation request message identifies an electronic message sent by said sending device; and

means for replying to said confirmation request message wherein said reply confirms that said sending device sent the received electronic message when the data identifying said received electronic message contained within said confirmation request message identifies a message sent by said sending device and wherein said reply denies that said sending device sent the received electronic message when the data identifying the received electronic message contained within said confirmation request message does not identify an electronic message sent by said sending device.

13. The system of claim 12 wherein the data identifying said received electronic message by said receiving module comprises the date and time the received electronic message was prepared and the electronic address for the purported sender of said received electronic message and wherein the data identifying each said electronic message sent by said sending device comprises the date and time each said electronic message was prepared and the electronic address for the sender of each said sent electronic message.

14. The system of claim 12 wherein the data identifying said received electronic message by said receiving module comprises the date and time the received electronic message was prepared, the electronic address for the purported sender of said received electronic message, and the electronic addresses for the intended recipients of said received electronic message and wherein said data identifying each said electronic message sent by said sending device comprises the date and time each said electronic message was prepared, the electronic address for the sender of each said sent electronic message, and the electronic addresses for the intended recipients of each said sent electronic message.

15. The system of claim 12 wherein the receiving module further comprises means for encrypting said confirmation request and means for decrypting said reply to said confirmation request and wherein said confirmation device further comprises means for decrypting said confirmation request and means for encrypting said reply to said confirmation request message.

16. A system for preventing the delivery of unsolicited and undesired electronic messages comprising:

a sending device sending electronic messages wherein each said electronic message sent by said sending device contains data identifying each said electronic message sent and wherein each said electronic message sent by said sending device contains data identifying said sending device;

a confirmation device in communication with said sending device;

in a receiving device receiving electronic messages, said receiving device communicating with a receiving module;

said receiving module comprising:

means for temporarily withholding from delivery to the intended recipient an electronic message received by said receiving device;

means for preparing an identification data string from said received electronic message wherein said identification data string is prepared by applying an algorithm to said received electronic message;

means for locating within said received electronic message data identifying the device from which the received electronic message is purported to have been sent;

means for preparing and transmitting a confirmation request wherein said confirmation request contains said identification data string prepared by said receiving module for said received electronic message;

means for receiving a reply to a confirmation request wherein said reply affirms or denies that said received electronic message was sent by said device identified as the purported sender of said received electronic message, and;

means for permitting delivery of said received electronic message to the intended recipient when the reply to said confirmation request message affirms that the device identified as the purported sender of the message sent the message;

said sending device comprising means for preparing an identification data string for each said electronic message sent by said sending device wherein said identification data string is prepared by applying said algorithm to each said sent electronic message and further comprising means for transmitting said identification data string for each said electronic message to said confirmation device;

said confirmation device comprising

means for storing said identification data string for each said electronic message sent by said sending device;

means for receiving a confirmation request from said receiving module;

means for comparing the identification data string for said received electronic message within said confirmation request with each identification data string for each said electronic message sent by said sending device and stored by said confirmation device to determine whether the identification data string for said received electronic message in said confirmation request identifies an electronic message sent by said sending device; and

means for replying to said confirmation request message wherein said reply confirms that said sending device sent the received electronic message when the identification data string identifying said received electronic message contained within said confirmation request message identifies a message sent by said sending device and wherein said reply denies that said sending device sent the received electronic message when the identification data string identifying the received electronic message contained within said



confirmation request message does not identify an electronic message sent by said sending device.

17. A method for preventing the delivery of unsolicited and undesired electronic messages in a network comprising at least one sending device sending electronic messages and at least one receiving device receiving electronic messages wherein each said electronic message sent by said sending device contains data identifying each said electronic message sent and wherein each said electronic message sent by said sending device contains data identifying the sending device purportedly sending each said electronic message, the method comprising the steps of:

preparing, by said sending device, an information record for each said electronic message sent by said sending device wherein each said information record contains data identifying each said electronic message sent by said sending device;

storing each said information record prepared by said sending device;

transmitting, by said sending device, an electronic message to said receiving device;

receiving, by said receiving device, an electronic message sent by said sending device;

withholding the delivery to the intended recipient of said electronic message received by said receiving device;

locating, by said receiving device, within said received electronic message device, data identifying said received electronic message and data identifying said sending device from which the received electronic message is purported to have been sent, wherein said data identifying said received electronic message corresponds to said data identifying each electronic message sent by said sending device and stored by said sending device in an information record;

preparing, by said receiving device, a confirmation request wherein said confirmation request contains data identifying said received electronic message wherein said data identifying said received electronic message corresponds to data identifying each electronic message sent by said sending device and stored by said sending device in an information record;

transmitting, by said receiving device, said confirmation request to said sending device purported to have been the sender of said received electronic message;

receiving, by said sending device, said confirmation request wherein said confirmation request contains data identifying a received electronic message by said receiving device and wherein said data identifying a received electronic message corresponds to data identifying an electronic message sent by said sending device and stored in an information record;

comparing, by said sending device, data identifying said received electronic message with data in each said information record to determine whether said received electronic message was sent by said sending device;

~~receiving, by said receiving device, a reply to said confirmation request, wherein said reply~~  
~~affirms that said received electronic message was sent by said sending device when said~~  
~~data identifying said received electronic message identifies an electronic message sent by~~  
~~said sending device and wherein said reply denies that said received electronic message~~  
5 ~~originated from said sending device when said data identifying said received electronic~~  
~~message in said confirmation request does not identify an electronic message sent by said~~  
~~sending device;~~

~~receiving, by said receiving device, a reply to said confirmation record, and;~~

~~making available for delivery, by said receiving device, said received electronic~~  
10 ~~message to said intended recipient when said reply to said confirmation record affirms that~~  
~~said sending device sent said received electronic message.~~

18. The method of claim 17 wherein the data identifying each said electronic  
message sent by said sending device comprises the date and time the electronic message  
was prepared and the electronic address for the purported sender of each said sent  
15 electronic message and wherein said data identifying each said received electronic message  
received by said receiving device comprises the date and time said electronic message was  
prepared and the electronic address for the purported sender of said received electronic  
message.

19. The method of claim 17 wherein the data identifying each said electronic  
20 message sent by said sending device comprises the date and time the sent electronic  
message was prepared, the electronic address for the purported sender of said sent  
electronic message, and the electronic addresses for the intended recipients of said sent  
electronic message and wherein said data identifying each said received electronic message  
received by said receiving device comprises the date and time the received electronic  
25 message was prepared, the electronic address for the purported sender of said received  
electronic message, and the electronic addresses for the intended recipients of said received  
electronic message.

20. The method of claim 17 wherein the step of transmitting a confirmation  
request by said receiving device further includes encrypting said confirmation request, the  
30 step of receiving said confirmation request by said sending device further includes  
decrypting said confirmation request, the step of replying to said confirmation request by  
said sending device further includes encrypting said reply, and the step of receiving said  
reply by said receiving device further includes decrypting said reply.

21. The method of claim 17 wherein the method further includes the steps of:  
35 preparing, by said sending device and by applying an algorithm to each said  
electronic message sent by said sending device, an identification data string for each said  
electronic message sent by said sending device and including said identification data string  
in said information record for each said sent electronic message;

preparing, by said receiving device for said received electronic message, an identification data string for said received electronic message by applying said algorithm to said received electronic message, and;

wherein the step of preparing said confirmation request further includes including said identification data string for said received electronic message in said confirmation request and wherein the step of comparing, by said sending device, data identifying said received electronic message with data in each said information record further includes comparing said identification data string in said confirmation request with each said identification data string in each said information record for each said sent electronic message to determine whether said received electronic message was transmitted by said sending device.

22. The method of claim 21 wherein the method further includes the step of appending to said electronic message transmitted by said sending device to said receiving device said identification data string prepared for said electronic message transmitted to said receiving device.

23. The method of claim 21 wherein the step of transmitting a confirmation request by said receiving device further includes encrypting said confirmation request, the step of receiving said confirmation request by said sending device includes decrypting said confirmation request, the step of replying to said confirmation request by said sending device further includes encrypting said reply, and the step of receiving said reply by said receiving device further includes decrypting said reply.

24. A method for preventing the delivery of unsolicited and undesired electronic messages in a network comprising at least one sending device sending electronic messages, at least one receiving device receiving electronic messages and at least one confirming device, confirming the authenticity of electronic messages sent by at least one sending device, wherein each said electronic message sent by said sending device contains data identifying each said electronic message sent and wherein each said electronic message sent by said sending device contains data identifying the sending device purportedly sending each said electronic message, the method comprising the steps of:

transmitting to said confirming device by said sending device, data identifying each said electronic message sent by said sending device,

preparing, by said confirming device, an information record for each said electronic message sent by said sending device wherein each said information record contains data identifying each said electronic message sent by said sending device;

storing said information records by said confirming device;

transmitting, by said sending device, an electronic message to said receiving device; receiving, by said receiving device, an electronic message sent by said sending device;

withholding the delivery to the intended recipient of said electronic message received by said receiving device;

locating, by said receiving device, within said received electronic message device, data identifying said received electronic message and data identifying said sending device from which the received electronic message is purported to have been sent, wherein said data identifying said received electronic message corresponds to said data identifying each  
5 electronic message sent by said sending device and stored by said confirming device in an information record;

preparing, by said receiving device, a confirmation request wherein said confirmation request contains data identifying said received electronic message wherein said data identifying said received electronic message corresponds to data identifying each electronic  
10 message sent by said sending device and stored by said confirming device in an information record and wherein said confirmation request contains data identifying said sending device from which the received electronic message is purported to have been sent;

transmitting, by said receiving device, said confirmation request to said confirming device;

15 receiving, by said confirming device, said confirmation request wherein said confirmation request contains data identifying an electronic message received by said receiving device and wherein said data identifying said received electronic message corresponds to data identifying an electronic message sent by said sending device and stored by said confirming device in an information record and wherein said confirmation  
20 request contains data identifying said sending device from which the received electronic message is purported to have been sent;

comparing, by said confirming device, data identifying said received electronic message with data in each said information record for said sending device purported to have sent said received electronic message to determine whether said received electronic  
25 message was transmitted by said sending device;

replying, by said confirming device, to said confirmation request, wherein said reply affirms that said received electronic message was sent by said sending device when said data identifying said received electronic message identifies an electronic message sent by said sending device and wherein said reply denies that said received electronic message was  
30 sent by said sending device when said data identifying said received electronic message in said confirmation request does not identify an electronic message sent by said sending device;

receiving, by said receiving device, a reply to said confirmation record, and;

making available for delivery, said received electronic message to said intended  
35 recipient when said reply to said confirmation record affirms that said sending device sent said received electronic message.

25. The method of claim 24 wherein the data identifying each said electronic message sent by said sending device comprises the date and time each said sent electronic message was prepared and the electronic address for the purported sender of each said  
40 sent electronic message and wherein said data identifying each said received electronic

message received by said receiving device comprises the date and time said electronic message was prepared and the electronic address for the purported sender of said received electronic message.

26. The method of claim 24 wherein the data identifying each said electronic message sent by said sending device comprises the date and time each said sent electronic message was prepared, the electronic address for the purported sender of each said sent electronic message, and the electronic addresses for the intended recipients of each said sent electronic message and wherein said data identifying each said received electronic message received by said receiving device comprises the date and time said received electronic message was sent, the electronic address for the purported sender of said received electronic message, and the electronic addresses for the intended recipients of said received electronic message.

27. The method of claim 24 wherein the step of transmitting a confirmation request by said receiving device further includes encrypting said confirmation request, the step of receiving said confirmation request by said confirming device includes decrypting said confirmation request, the step of replying to said confirmation request by said confirming device includes encrypting said reply, and the step of receiving said reply by said receiving device further includes decrypting said reply.

28. The method of claim 24 wherein the method further includes the steps of:  
preparing, by said sending device and by applying an algorithm to each said electronic message sent by said sending device, an identification data string for each said electronic message sent by said sending device, and;

preparing, by said receiving device for said received electronic message, an identification data string for said received electronic message by applying said algorithm to said received electronic message, and;  
wherein the step of transmitting to said confirming device by said sending device, data identifying each said electronic message sent by said sending device further includes transmitting said identification data string prepared for each said sent electronic message, wherein the step of preparing, by said confirming device, an information record for each said electronic message further comprises including each said identification data string in each said information record for each said sent electronic message and wherein the step of preparing, by said receiving device, a confirmation request further includes including said identification data string for said received electronic message in said confirmation request and wherein the step of comparing, by said confirming device, data identifying said received electronic message with data in each said information record further includes comparing said identification data string in said confirmation request with each said identification data string in each said information record for each said sent electronic message to determine whether said received electronic message was sent by said sending device.

29. The method of claim 28 wherein the method further includes the step of appending to said electronic message transmitted by said sending device to said receiving

device said identification data string prepared for said electronic message transmitted to said receiving device.

30. The method of claim 28 wherein the step of transmitting a confirmation request by said receiving device further includes encrypting said confirmation request, the step of receiving said confirmation request by said confirming device includes decrypting said confirmation request, the step of replying to said confirmation request by said confirming device further includes encrypting said reply, and the step of receiving said reply by said receiving device further includes decrypting said reply.

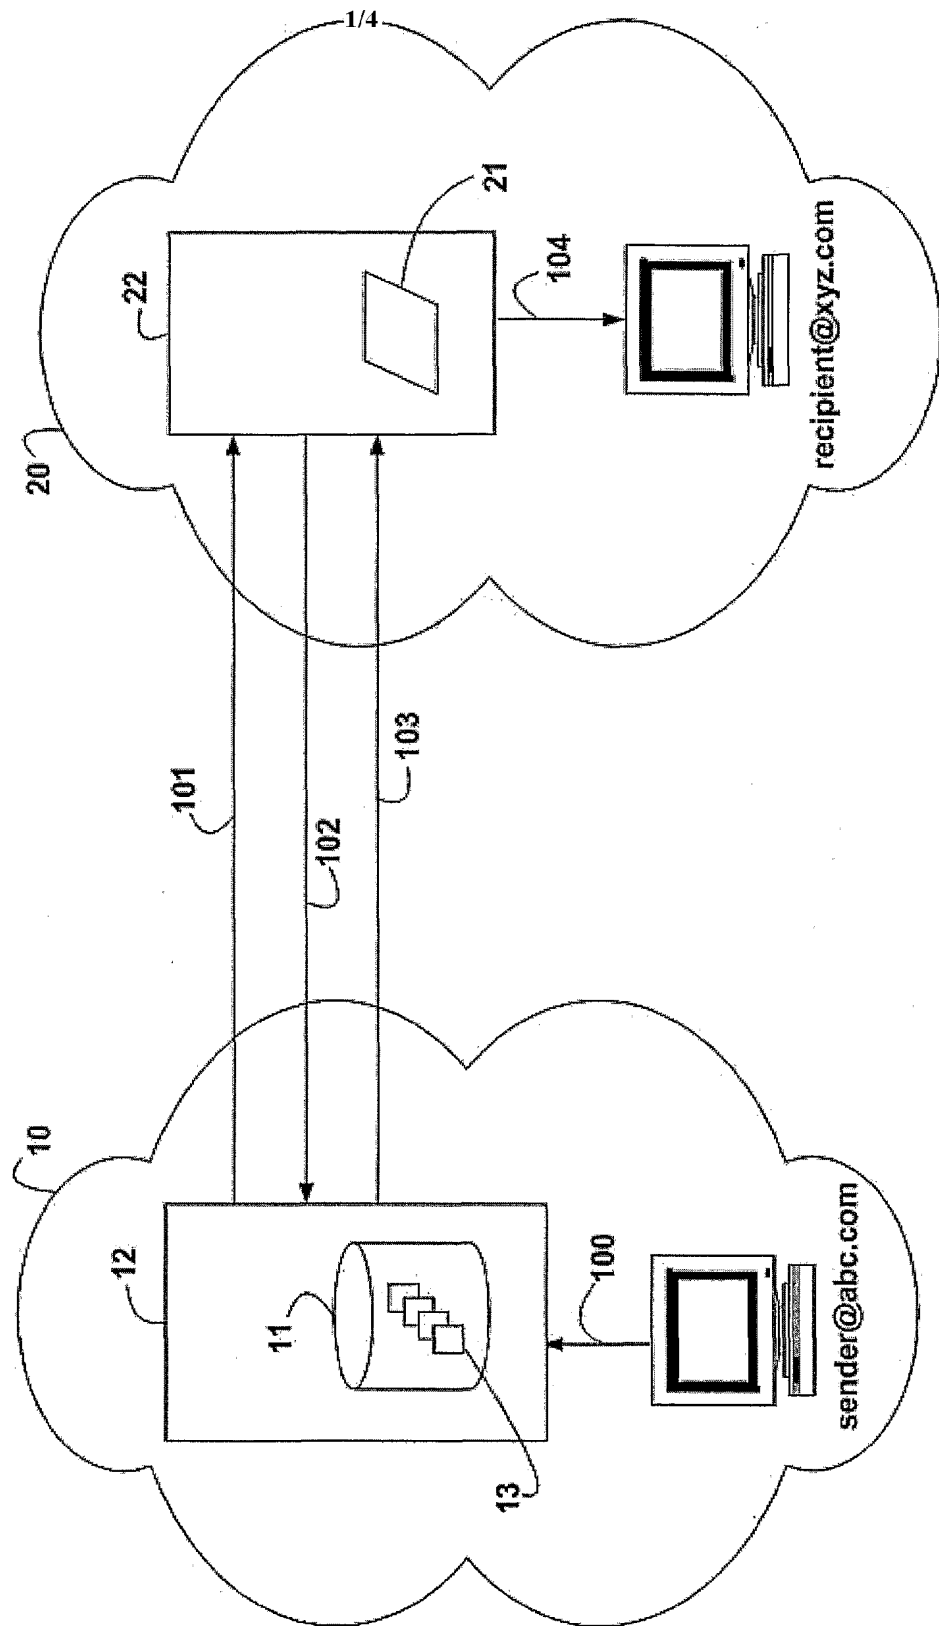


Figure 1

Figure 2

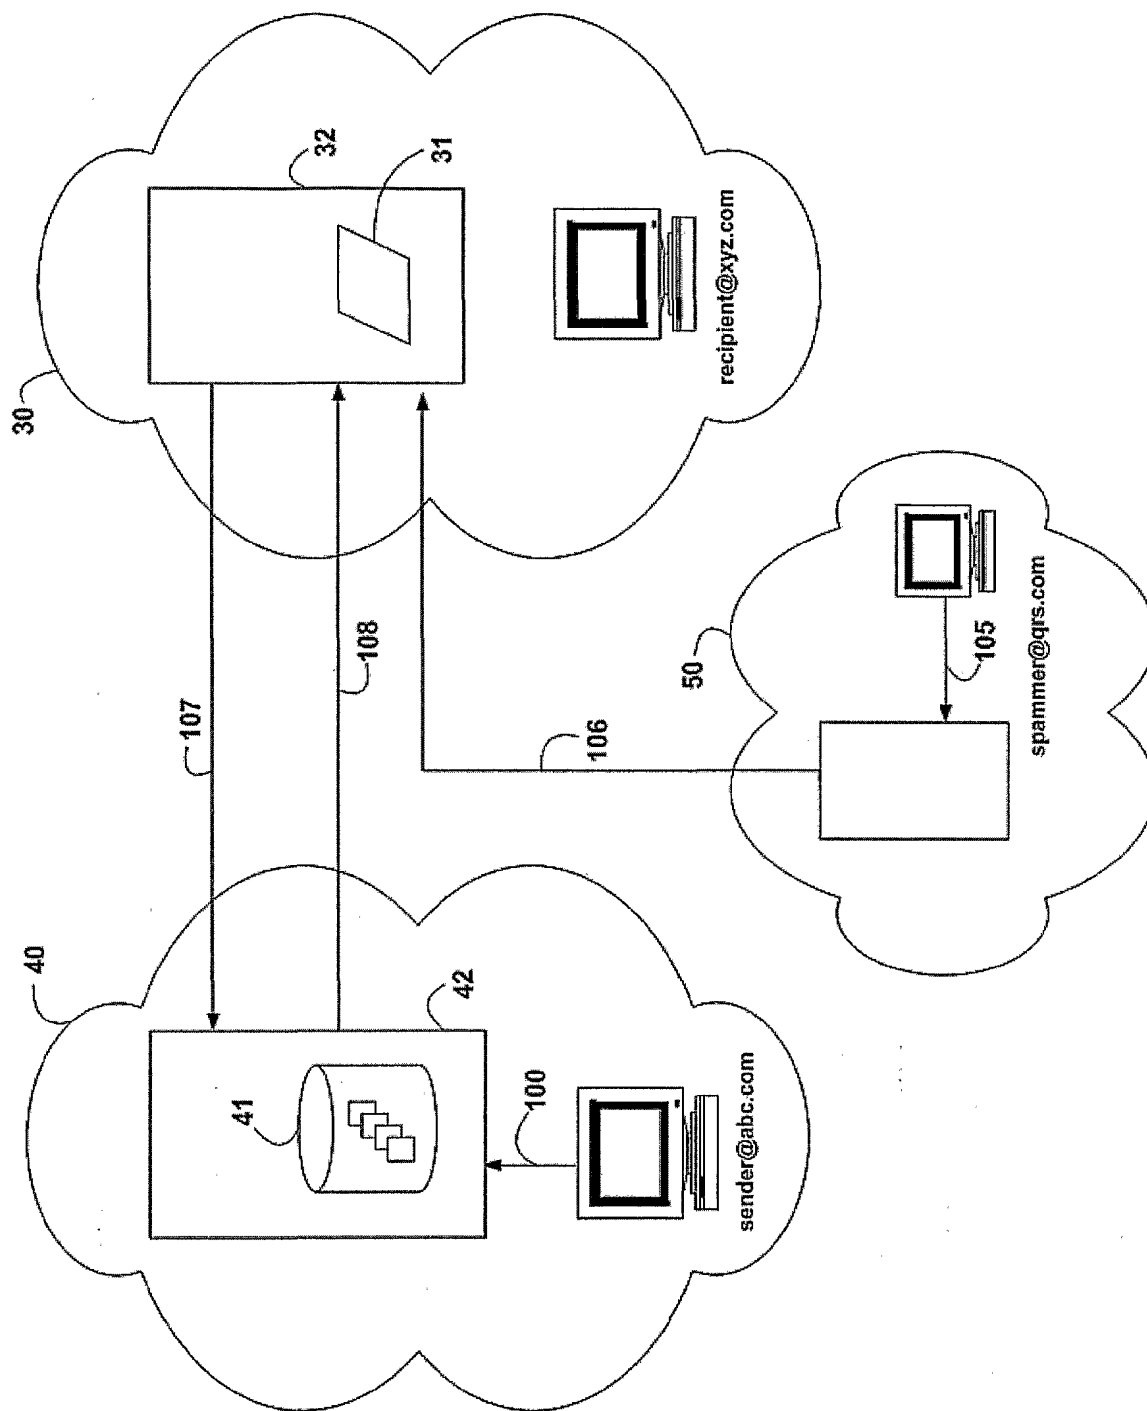
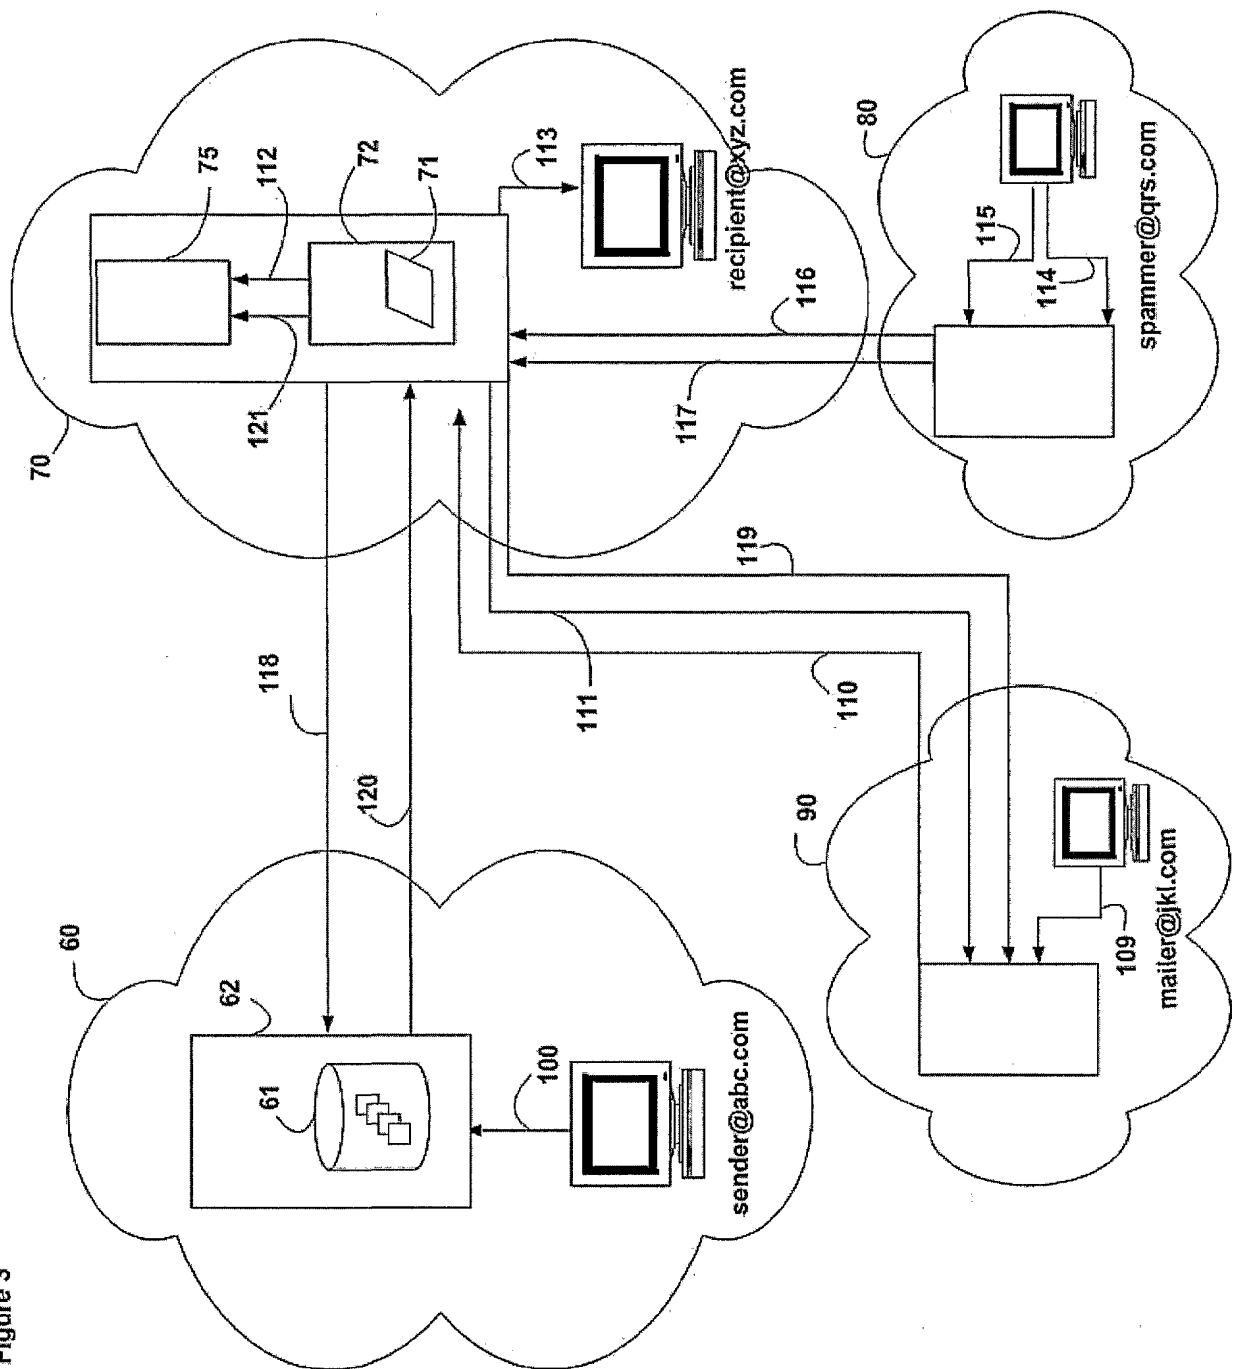




Figure 3



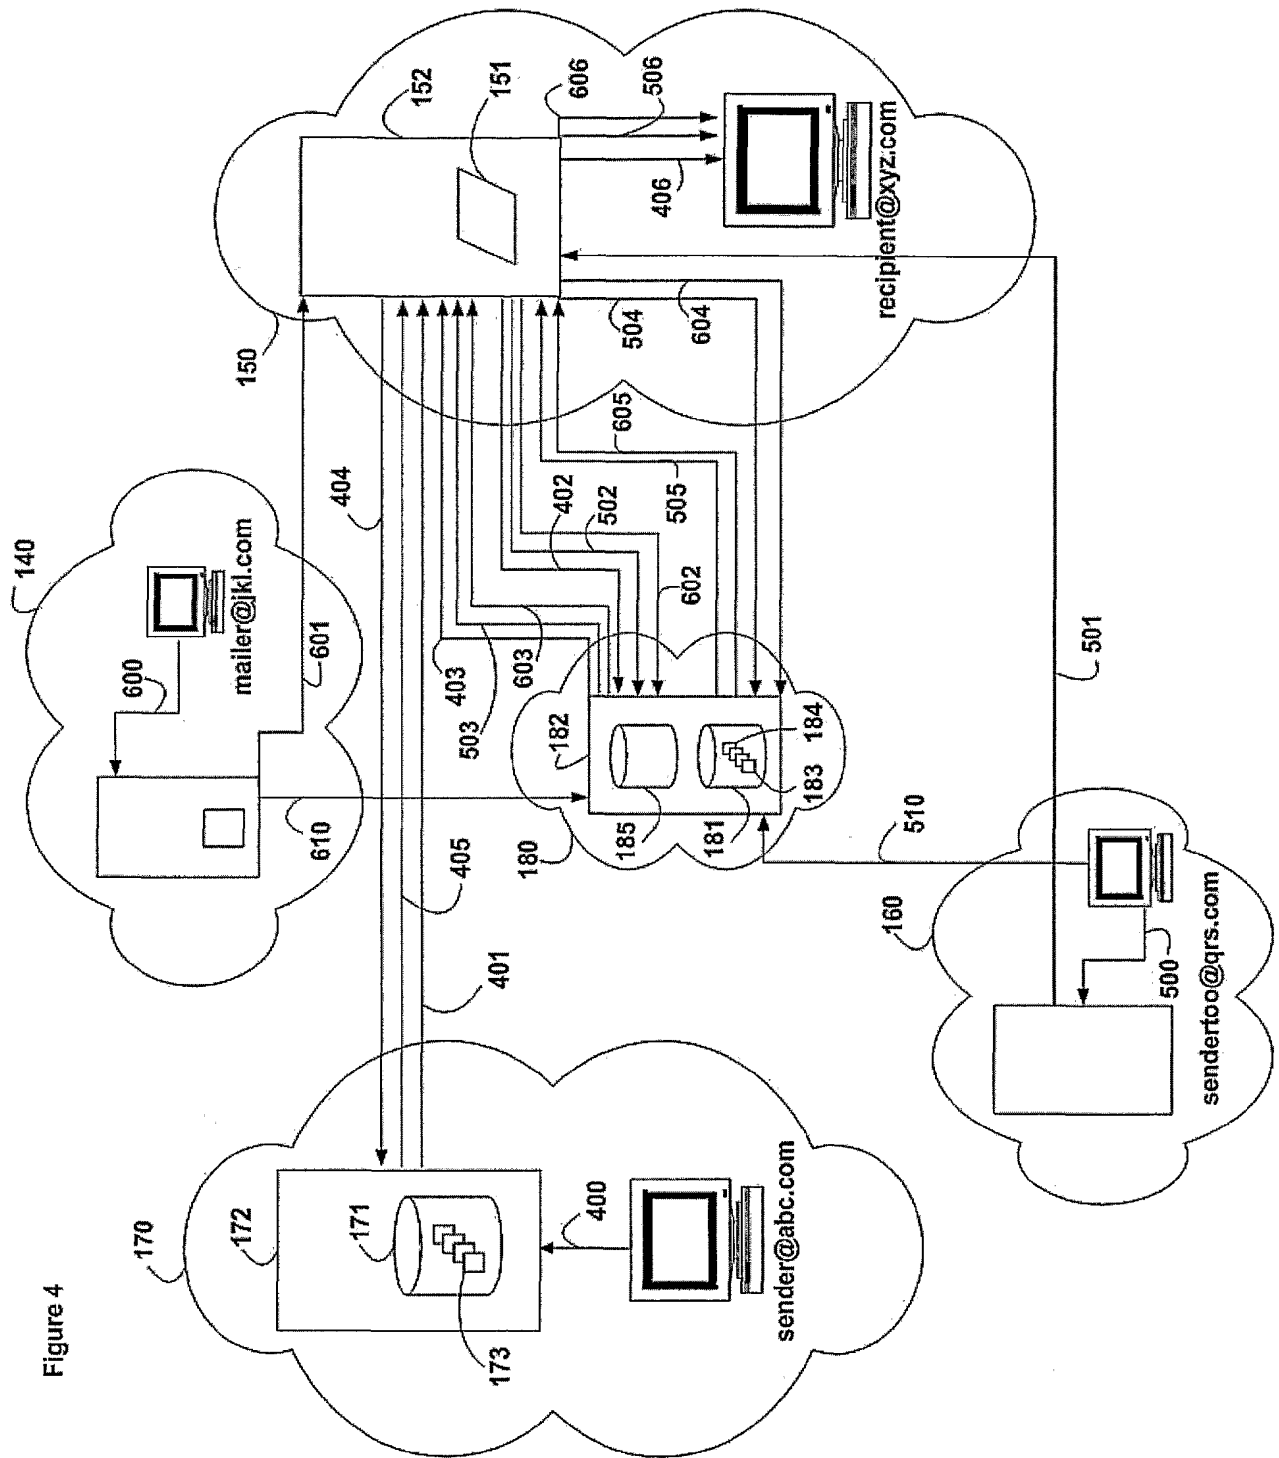


Figure 4

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US05/28510

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 15/16  
US CL : 709/206-207

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 709/206-207

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                  | Relevant to claim No.   |
|------------|---|---|
| X          | US 200500441 56 A1 (Kaminski et al) 24 Feb 2005, paragraph (0004, 0018, 0023, 0024, 0026, 0034, 0036, 0045, Fig 1). | 1, 5, 7-8, 12, 16-17, 24, 21-22, 28-30<br>-----<br>2-4, 6, 9-11, 13-15, 18-20, 23, 25-27-26 |
| Y          | US 200200462 50 A1 (Nassiri) 18 April 2002, paragraph (0015, 0067).   | 2, 3, 9-10, 13-14, 18-19, 25-26   |
| Y          | US 200501442 39 A1 (Mattathil) 30 June 2005, paragraph (0041, 0073).  | 4, 6, 11, 15, 20, 23, 27  |

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 November 2005 (02.11.2005)

Date of mailing of the international search report

18 NOV 2005

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
Commissioner for Patents  
P. O. Box 1450  
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

for Michelle L. Eason  
Andrew Caldwell

Telephone No. (703)305-3900